


ROSE

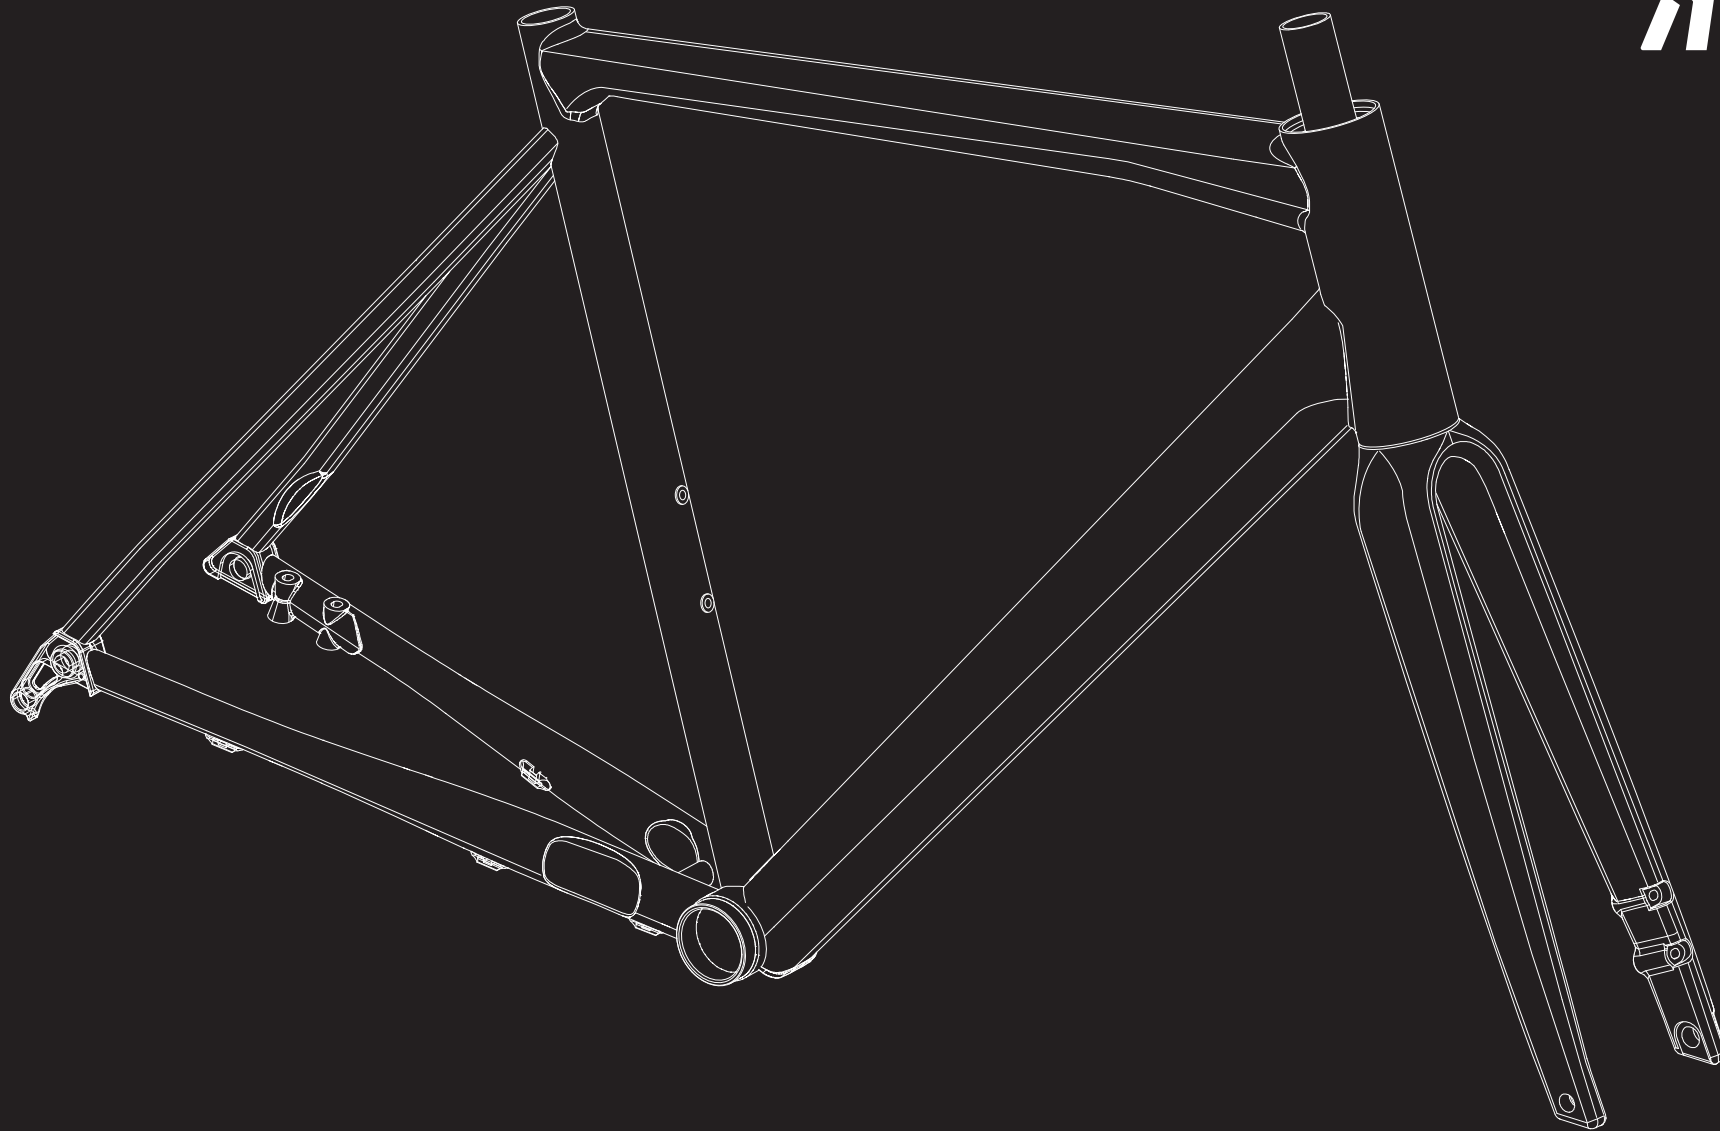

ANY QUESTIONS?

technik@rosebikes.com



ROSE Bikes GmbH
Schersweide 4
46395 Bocholt, Germany

PRO^{SL}

DISC BRAKE
FRAME DETAILS

PRO SL

DISC BRAKE FRAME DETAILS

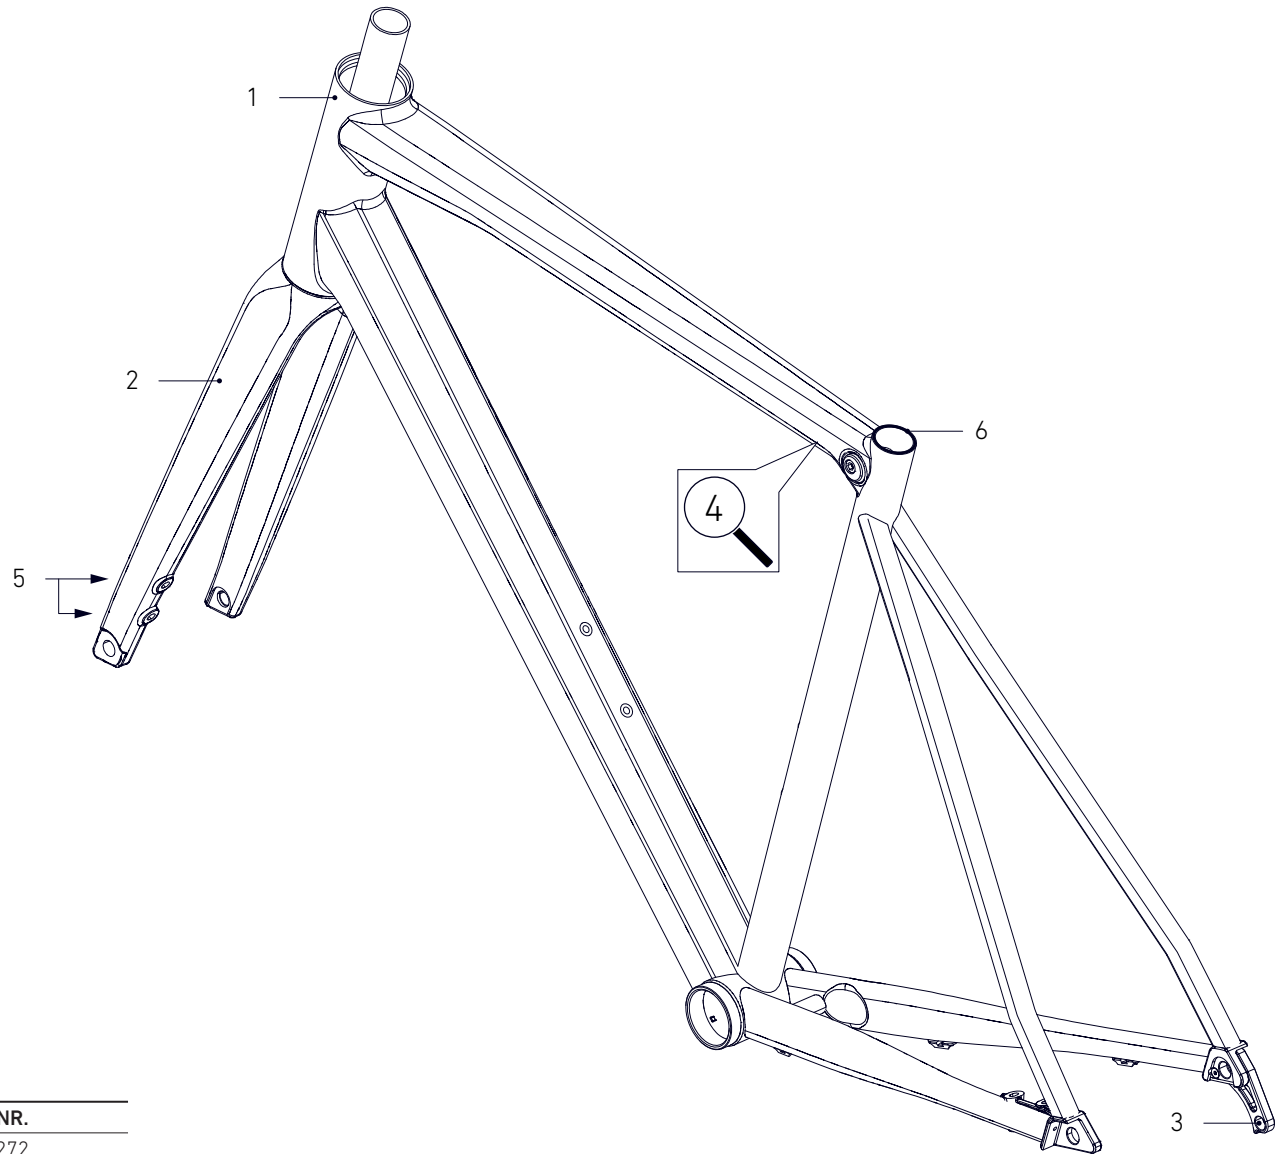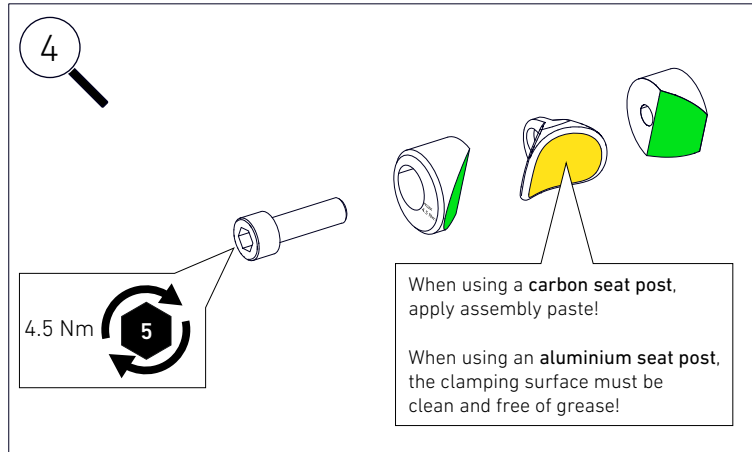


FRAME SPARE PARTS

POS.	DESCRIPTION	SPECIFICATIONS	ART. NR.
1	frame	color: red	2291272
		color: grey	2291273
2	fork	color: red, size: 650B	2292864
		color: red, size: 28"	2291278
		color: grey, size: 650B	2292865
		color: grey, size: 28"	2291279
3	derailleur hanger	direct mount	2297413
		standard	2297412
4	seatpost clamp	3 pieces + fixing screw M6 x 20 mm	2312064
5	rubber plug	screw head cover brake mount	2274682
6	rubber ring	dirt seal seat tube	2256912

GREASE	DYNAMIC GALLI BEARING 100 g	49217800
	DYNAMIC GALLI BEARING 400 g	49217900
CARBON ASSEMBLY PASTE	for example DYNAMIC, Art. Nr. 25377201	

PRO SL

DISC BRAKE FRAME DETAILS

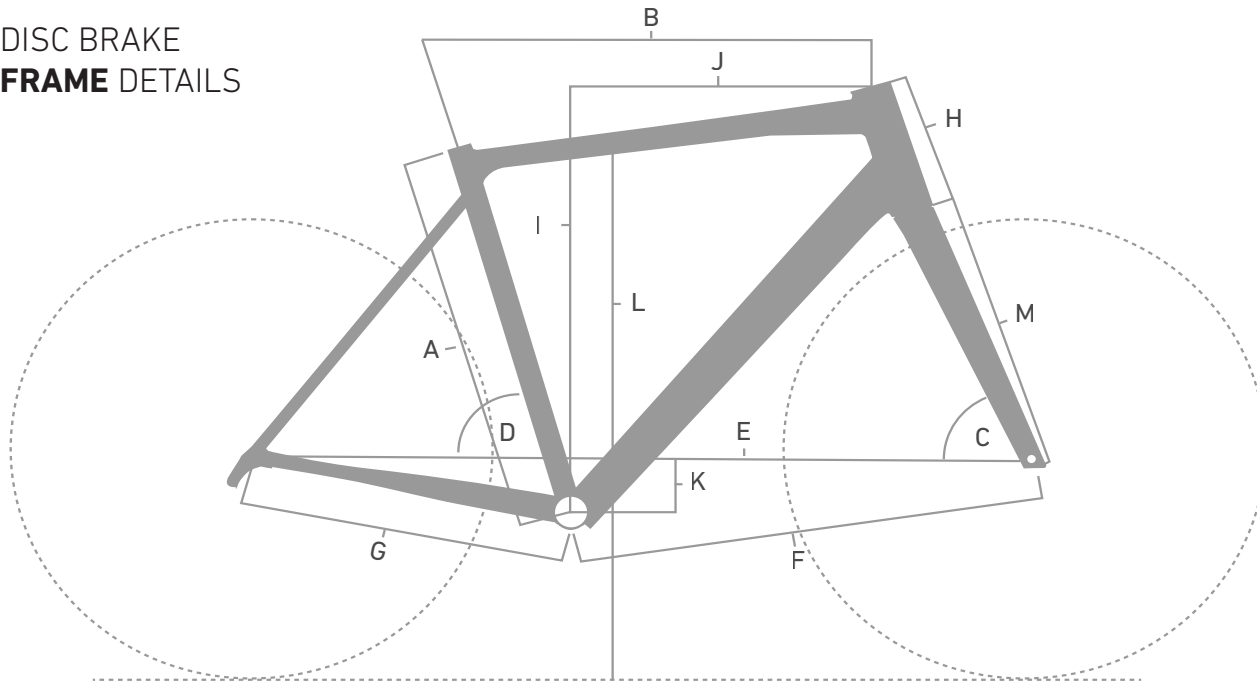

FRAME INTERFACES

BOTTOM BRACKET	Shimano: SM-BB72-41B Pressfit
HEADSET	ACROS, Art. Nr. 2292463
FRONT WHEEL AXLE	length: 121 mm, M12 x 1.5 e.g. DT Swiss Plug in E-Thru Road , Art. Nr. 227585701
REAR WHEEL AXLE	length: 163 mm, M12 x 1.5, thread length: 13 mm e.g. DT Swiss Plug in E-Thru Road , Art. Nr. 227469001
FRONT HUB SPACING	100 x 12 mm
REAR HUB SPACING	142 x 12 mm
Ø SEATPOST	27.2 mm
MAX. Ø BRAKE DISC	160 mm (front & rear)
MAX. TIRE SIZE	32 mm
MAX. CHAINRING SIZE	50 / 34
BOTTLE CAGE	yes, 2x

MAX SYSTEM WEIGHT (RIDER + BICYCLE + CLOTHING + GEAR + LUGGAGE): 110 KG

FRAME GEOMETRY

SIZE		45	48	51	53	55	57	59	61	63	65
SEATTUBE LENGTH [MM]	A	420	445	475	495	505	515	535	560	580	605
TOPTUBE LENGTH HORIZONTAL [MM]	B	497	508	521	533	545	558	572	588	606	626
HEAD TUBE ANGLE	C	71°		71.5°	72°		72.5°	72.75°	73°	73.25°	73.5°
SEAT TUBE ANGLE	D	75°		74.5°	74.25°	74°	73.75°	73.5°	73.25°	73°	72.75°
WHEELBASE [MM]	E	963	975	973	980.5	993.5	999.5	1010	1026	1038	1058
FRONT CENTER [MM]	F	566	578	580.5	586	595.5	601.5	611	621.5	634	647.5
REAR CENTER [MM] (CHAINSTAY LENGTH)	G	404		406		409		414		420	
HEADTUBE LENGTH [MM]	H	120	140	133	147	163	180	193	210	228	245
STACK [MM]	I	493	512	533	548	563	581	591.5	608.5	627	644
REACH [MM]	J	365	371	373	378.5	383.5	388.5	397	405	414.5	426
BB DROP [MM]	K	59		73			70				
STANDOVER HEIGHT [MM]	L	698	720	758	775	793	811	829	847	865	882